


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=4mm F2.8
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 5 百万像素高品质影像
- ◆ 高分辨率、高对比度、低畸变
- ◆ 紧凑型结构，抗震性能好
- ◆ 适用工业检测,道路监控等



产品规格书：

500 万像素 4mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)	
型号 Model	HM0428MP5	mm	-	H	V
像机尺寸 Image Size	2/3-inch	1000	0.0042X	2138.39	1603.79
焦距 Focal length	4mm	900	0.0046X	1928.91	1446.68
光圈范围 F No.	F2.8-16	800	0.0052X	1719.43	1289.57
最短物距 M.O.D(m)	0.06-Inf.	750	0.0055X	1614.69	1211.01
控制方式 Operation	Iris	Manual 手动调整	700	0.0059X	1509.94
	Focus	Manual 手动调整	650	0.0063X	1405.20
视场角 Angle of View (D×H×V)	2/3"	106°×96.4°×79.8°	600	0.0068X	1300.46
	1/2"	91.1°×78°×61.5°	550	0.0074X	1195.72
畸变 Distortion	<3%	500	0.0081X	1090.98	818.24
光学后焦 BFL	7.4mm	450	0.009X	986.24	739.68
接口 Mount	C-Mount	400	0.01X	881.51	661.13
近摄视野 Object Dimension	253mm×190mm(WD=100mm)	350	0.0114X	776.77	582.58
外形尺寸 Dimension	Φ47×48.7mm	300	0.0131X	672.04	504.03
重量 Weight	150g	250	0.0155X	567.31	425.48
分辨率 Horizontal Resolution	5MP	200	0.0190X	462.59	346.94
滤镜尺寸 Filter Thread	/	150	0.0247X	357.90	268.42
工作温度 Working Temperature	-20℃ ~ +60℃	100	0.0351X	253.29	189.96

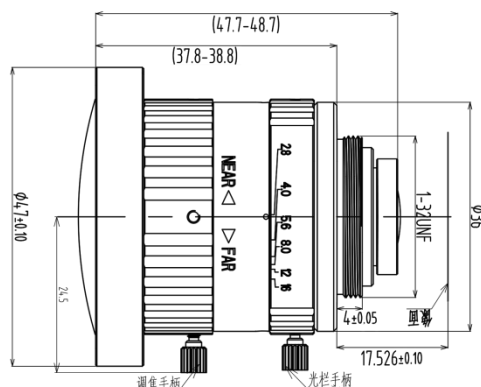