


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：4/3" C 型 f=16mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.3%
- ◆ 适用机器视觉, 工业监控等

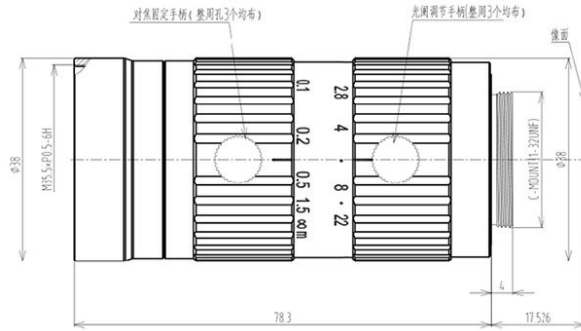

产品规格书：

2000 万像素 16mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3"Field of View(mm)		
型号 Model	KM1628MP20	mm	X	H	V	
相机靶面 Image Size	4/3-inch	5000	0.032X	5583.6	4185.4	
焦距 Focal length	16mm	2000	0.0079X	2238.7	1677.9	
光圈范围 F No.	F2.8-22	1000	0.0158X	1124.1	842.3	
最短物距 M.O.D(m)	0.1-Inf.	900	0.0176X	1012.7	758.9	
控制方式 Operation	Iris	Manual 手动调整	800	0.0197X	901.7	675.7
	Focus	Manual 手动调整	700	0.0225X	790.0	592.0
视场角 Angle of View (DxHxV)	4/3"	69°x57.6°x44.8°	600	0.0262X	678.5	508.4
	1"	53.1°x43.6°x33.4°	550	0.0286X	622.7	466.5
	2/3"	37.9°x30.8°x23.3°	500	0.0314X	566.9	424.7
畸变 Distortion	<0.3%	450	0.0348X	511.2	383.0	
光学后焦 BFL	22.4mm	400	0.0391X	455.5	341.2	
接口 Mount	C-Mount	350	0.0445X	399.7	299.3	
近摄视野 Object Dimension	343.8mmx257.5mm(WD=300 mm)	300	0.0518X	343.8	257.5	
外形尺寸 Dimension	Φ38x78.3mm	250	0.0618X	288.1	215.7	
重量 Weight	183.3g	200	0.0767X	232.2	173.8	
滤镜尺寸 Filter Thread	M35.5x 0.5	150	0.101X	176.4	132.0	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.148X	120.5	90.1	