


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 8mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书:

1200 万像素 8mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View(7.6*5.7mm)		
型号 Model	LM0828MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch(Φ9.5)	1000	0.0081X	938.03	704.94	
焦距 Focal length	8mm	900	0.0090X	845.85	635.60	
光圈范围 F No.	F2.8-16	800	0.0101X	753.67	566.26	
最短物距 M.O.D(m)	0.1-Inf.	700	0.0115X	661.49	496.92	
控制方式 Operation	Iris	Manual 手动调整	650	0.0124X	615.40	462.25
	Focus	Manual 手动调整	600	0.0134X	569.30	427.58
视场角 (D*H*V) Angle of View	1/1.7"	59.53°x49.48°x38.24°	550	0.0145X	523.21	392.91
畸变 Distortion	<0.3%	500	0.0160X	477.11	358.24	
光学后焦 BFL	9.77~10.39mm	450	0.0177X	431.02	323.57	
法兰后焦距 Flange BFL	17.526mm	400	0.0198X	384.92	288.89	
接口 Mount	C-Mount	350	0.0225X	338.82	254.22	
最大主光线夹角 CRA	11.15°	300	0.0261X	292.71	219.54	
外形尺寸 Dimension	Φ32.5x42.54mm	250	0.0310X	246.60	184.86	
重量 Weight	63.5.0g	200	0.0382X	200.48	150.17	
滤镜尺寸 Filter Thread	M30.5xP0.5	150	0.0497X	154.33	115.47	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.0712X	108.14	80.74	

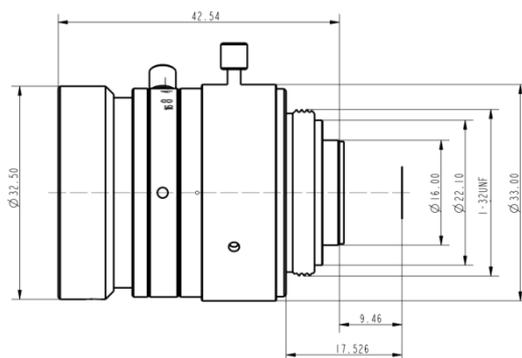