


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 12mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书：

1200 万像素 12mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View(7.6*5.7mm)		
型号 Model	LM1228MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch(Φ9.5)	1000	0.0122X	624.98	469.16	
焦距 Focal length	12mm	900	0.0131X	563.56	423.03	
光圈范围 F No.	F2.8-16	800	0.0151X	502.15	376.89	
最短物距 M.O.D(m)	0.1-Inf.	700	0.0173x	440.72	330.76	
控制方式 Operation	Iris	Manual 手动调整	650	0.0180X	410.01	307.69
	Focus	Manual 手动调整	600	0.0195X	379.29	284.62
视场角 (D*H*V) Angle of View	1/1.7"	41.85°x34.14°x25.97°	550	0.0213X	348.57	261.55
畸变 Distortion	<0.005%	500	0.0233X	317.85	238.47	
光学后焦 BFL	12.68~14.13mm	450	0.0259X	287.13	215.40	
法兰后焦距 Flange BFL	17.526mm	400	0.0290X	256.39	192.31	
接口 Mount	C-Mount	350	0.0330X	225.65	169.23	
最大主光线夹角 CRA	5.7°	300	0.0391X	194.90	146.13	
外形尺寸 Dimension	Φ29x46mm	250	0.0457X	164.13	123.02	
重量 Weight	61.8g	200	0.0572X	133.33	99.89	
滤镜尺寸 Filter Thread	M27xP0.5	150	0.0739X	102.48	76.72	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.1072X	71.49	53.46	

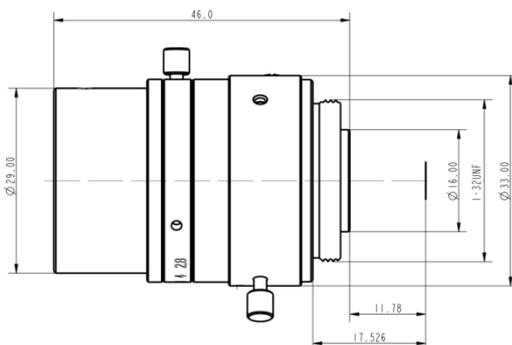