


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 16mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书:

1200 万像素 16mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View(7.6*5.7mm)		
型号 Model	LM1628MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch(Φ9.5)	1000	0.0160X	475.92	357.18	
焦距 Focal length	16mm	900	0.0177X	429.09	322.02	
光圈范围 F No.	F2.8-16	800	0.0199X	382.26	286.85	
最短物距 M.O.D(m)	0.1-Inf.	700	0.0227x	335.41	251.68	
控制方式 Operation	Iris	Manual 手动调整	650	0.0244X	311.98	234.09
	Focus	Manual 手动调整	600	0.0263X	288.55	216.49
视场角 (D*H*V) Angle of View	1/1.7"	32.53°x26.34°x19.93°	550	0.0287X	265.11	198.90
畸变 Distortion	<0.018%	500	0.0315X	241.67	181.29	
光学后焦 BFL	10.0~12.58mm	450	0.0348X	218.22	163.68	
法兰后焦距 Flange BFL	17.526mm	400	0.0391X	194.75	146.07	
接口 Mount	C-Mount	350	0.0444X	171.27	128.44	
最大主光线夹角 CRA	8.1°	300	0.0515X	147.77	110.79	
外形尺寸 Dimension	Φ29x40.0mm	250	0.0613X	124.23	93.12	
重量 Weight	59.0g	200	0.0757X	100.62	75.40	
滤镜尺寸 Filter Thread	M27xP0.5	150	0.0992X	76.90	57.60	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.1443X	52.92	39.62	

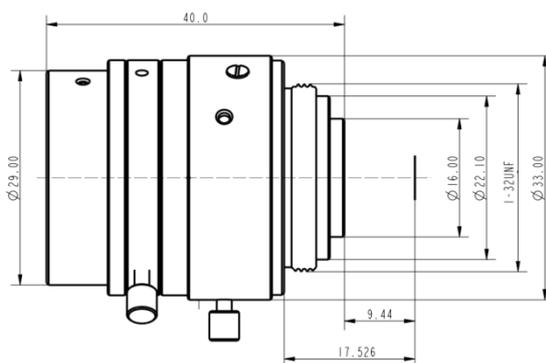