


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 25mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书：

1200 万像素 25mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View(7.6*5.7mm)		
型号 Model	LM2528MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch(Φ 9.5)	1000	0.0253X	300.25	225.28	
焦距 Focal length	25mm	900	0.0280X	271.18	203.45	
光圈范围 F No.	F2.8-16	800	0.0314X	242.33	181.79	
最短物距 M.O.D(m)	0.2-Inf.	700	0.0357X	213.17	159.90	
控制方式 Operation	Iris	Manual 手动调整	650	0.0383X	198.62	148.97
	Focus	Manual 手动调整	600	0.0413X	184.03	138.02
视场角 (D*H*V) Angle of View	1/1.7"	22.0°×17.8°×13.4°	550	0.0449X	169.41	127.04
畸变 Distortion	<0.02%	500	0.0492X	154.75	116.03	
光学后焦 BFL	9.98~14.2mm	450	0.0543X	140.03	104.98	
法兰后焦距 Flange BFL	17.526mm	400	0.0608X	125.24	93.89	
接口 Mount	C-Mount	350	0.0690X	110.37	82.72	
最大主光线夹角 CRA	7.77°	300	0.0799X	95.37	71.48	
外形尺寸 Dimension	Φ29×39.9mm	250	0.0950X	80.22	60.11	
重量 Weight	48.3.0g	200	0.1176X	64.82	48.56	
滤镜尺寸 Filter Thread	M27xP0.5	150	/	/	/	
工作温度 Working Temperature	-20°C ~ +60°C	100	/	/	/	

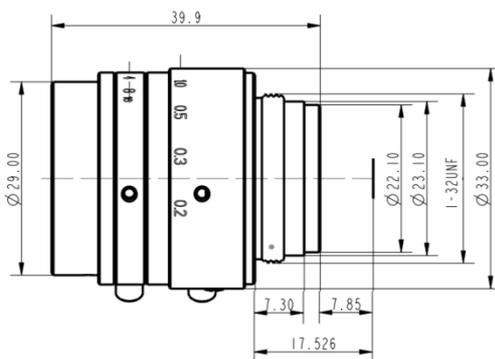