


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 30mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书:

1200 万像素 30mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View(7.6*5.7mm)		
型号 Model	LM3028MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch(Φ9.5)	1000	0.0369X	206.23	154.69	
焦距 Focal length	30mm	900	0.0407X	186.59	139.95	
光圈范围 F No.	F2.8-16	800	0.0456X	166.89	125.16	
最短物距 M.O.D(m)	0.2-Inf.	700	0.0517X	147.11	110.32	
控制方式 Operation	Iris	Manual 手动调整	650	0.0554X	137.18	102.87
	Focus	Manual 手动调整	600	0.0598X	127.22	95.40
视场角 (D*H*V) Angle of View	1/1.7"	16.99°×14.01°×9.38°	550	0.0649X	117.22	87.90
畸变 Distortion	<0.03%	500	0.0710X	107.18	80.37	
光学后焦 BFL	10.01~17.33mm	450	0.0784X	97.09	72.80	
法兰后焦距 Flange BFL	17.526mm	400	0.0875X	86.92	65.17	
接口 Mount	C-Mount	350	0.0992X	76.67	57.48	
最大主光线夹角 CRA	5.9°	300	0.1148X	66.30	49.70	
外形尺寸 Dimension	Φ33×29.4mm	250	0.1365X	55.76	41.80	
重量 Weight	49.2g	200	0.1692X	44.98	33.72	
滤镜尺寸 Filter Thread	M27xP0.5	150	/	/	/	
工作温度 Working Temperature	-20°C ~ +60°C	100	/	/	/	

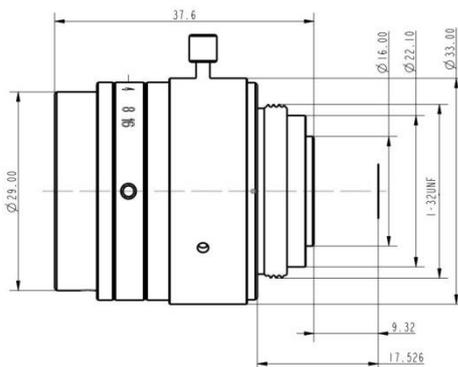