


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=35mm F2.8
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 适用于机器视觉，读码识别



产品规格书：

800 万像素 35mm FA 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3" Field of View(8.45*7.07m m)	
型号 Model	LM3528MP8	mm	X	H	V
像机尺寸 Image Size	Φ 11 mm(2/3")	∞	-	-	-
焦距 Focal length	35mm	1000	0.0360X	234.70	196.37
光圈范围 F No.	F2.8-16	900	0.0401X	210.56	176.17
最短物距 M.O.D(m)	0.2-Inf.	800	0.0453X	186.42	155.97
控制方式 Operation	Iris	Manual 手动调整	700	0.0521X	162.28
	Focus	Manual 手动调整	650	0.0563X	150.21
视场角(D*H*V) Angle of View	2/3"	15.88°×12.75°×9.59°	600	0.0612X	138.14
畸变 Distortion	<0.02%	550	0.0670X	126.07	105.48
光学后焦 BFL	13.91mm	500	0.0741X	114.00	95.38
法兰后焦 Flange BFL	17.526mm	450	0.0829X	101.94	85.28
接口 Mount	C-Mount	400	0.0940X	89.86	75.19
最大主光线夹角 CRA	6.3°	350	0.1086X	77.80	65.09
外形尺寸 Dimension	Φ33×37.2mm	300	0.1286X	65.73	54.99
重量 Weight	68.6g	250	0.1575X	53.66	44.89
分辨率 Resolution	8MP	200	0.1886X	44.80	37.48
滤镜尺寸 Filter Thread	M30.5x 0.5	150	0.2514X	33.60	28.11
工作温度 Working Temperature	-20℃ ~ +60℃	100	-	-	-

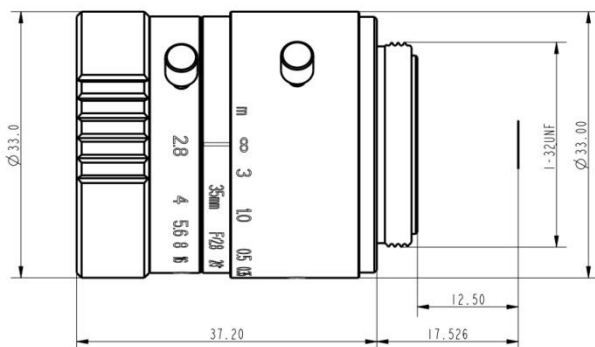