


2500 万像素工业镜头

SK2524MP25

- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1.2" C 型 25mm F2.4
- ◆ 多层镀膜, 消色差, 透过率好
- ◆ 2500 万像素超高分辨率
- ◆ 画面清晰度高, 光学性能出色
- ◆ 低畸变, 大光圈, 高周边光亮比
- ◆ 抗振动好, 兼容可见光和近红外

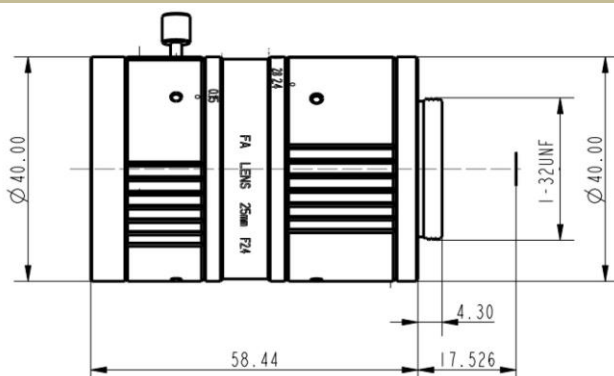

产品规格书：

2500 万像素 25mm 工业镜头 C Mount		物距 Working Distance	倍 率 Magnific ation	视野 1.2"Field of View(mm)	
型号 Model	SK2524MP25	mm	X	H	V
相机靶面 Image Size	1.2" (Φ19.3mm)	1000	0.0247X	592.53	512.40
焦距 Focal length	25mm	900	0.0274X	533.47	461.32
光圈范围 F No.	F2.4-F16	800	0.0309X	474.40	410.23
最短物距 M.O.D	0.15m	700	0.0353X	415.31	359.14
控制方式 Operation	Iris	Manual 手动调整	650	0.0380X	385.77
	Focus	Manual 手动调整	600	0.0411X	356.22
视场角 Angle of View (D×H×V)1.2"	41.18°×31.42°×27.33°	550	0.0448X	326.66	282.48
畸变 Distortion	0.04%	500	0.0493X	297.10	256.91
光学后焦 BFL	19.495mm	450	0.0547X	267.53	231.34
法兰后焦 Flange BFL	17.526mm	400	0.0616X	237.94	205.75
接口 Mount	C-Mount	350	0.0703X	208.34	180.15
最大主光线夹角 CRA	6.5°	300	0.0820X	178.70	154.51
外形尺寸 Dimension	Φ40×58.44mm	250	0.0983X	149.01	128.84
滤镜尺寸 Filter Thread	M37×P0.5	200	0.1229X	119.24	103.09
解像力 Resolution	25MP	150	0.1642X	89.27	77.16
温度 Working Temperature	-20°C ~ +60°C	-	-	-	-

