


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 f=6mm F2.4
- ◆ 多层镀膜，兼容可见光和红外光
- ◆ 1200 万像素高分辨率影像
- ◆ 高精度，低畸变，微距效果好
- ◆ 抗震性能好，高低温图像稳定
- ◆ 适用工业检测，机器视觉等

产品规格书：



| 1200 万像素 6mm 工业镜头 C Mount               |                    | 物距<br>Working Distance | 倍率<br>Optical Magnification | 视野<br>1/1.7" Field of View(7.4*5.6mm) |        |       |
|---|--------------------|------------------------|-----------------------------|---------------------------------------|--------|-------|
| 型号 Model                                | <b>VM0624MP12L</b> | mm                     | X                           | H                                     | V      |       |
| 像机尺寸 Image Size                         | 1/1.7-inch         | 5000                   | 0.0012x                     | 6366.1                                | 4801.3 |       |
| 焦距 Focal length                         | <b>6mm</b>         | 2000                   | 0.003X                      | 2556.9                                | 1928.5 |       |
| 光圈范围 F No.                              | F2.4-16            | 1000                   | 0.006X                      | 1284.0                                | 968.3  |       |
| 最短物距 M.O.D(m)                           | 0.1-Inf.           | 900                    | 0.0065x                     | 1157.0                                | 872.4  |       |
| 控制方式<br>Operation                       | Iris               | Manual 手动调整            | 800                         | 0.007X                                | 1029.9 | 776.6 |
|   | Focus              | Manual 手动调整            | 700                         | 0.008X                                | 902.9  | 680.8 |
| 视场角<br>Horizontal Angle of View (D×H×V) | 1/1.7"             | 76.01°×64.06°×50.54°   | 600                         | 0.010X                                | 775.8  | 585.0 |
|   | 1/2"               | 66.01°×64.8°×42.53°    | 550                         | 0.011X                                | 712.3  | 537.1 |
|   | 1/3"               | 53.56°×43.97°×33.71°   | 500                         | 0.012X                                | 649.1  | 489.4 |
| 畸变 Distortion                           | <0.1%              | 450                    | 0.013X                      | 585.3                                 | 441.2  |       |
| 光学后焦 BFL                                | 11.737mm           | 400                    | 0.014X                      | 521.8                                 | 393.3  |       |
| 法兰后焦距 Flange BFL                        | 17.526mm           | 350                    | 0.016X                      | 458.2                                 | 345.4  |       |
| 接口 Mount                                | C-Mount            | 300                    | 0.020X                      | 394.7                                 | 297.5  |       |
| 外形尺寸 Dimension                          | Φ45.2×44.83mm      | 250                    | 0.023X                      | 331.2                                 | 249.6  |       |
| 重量 Weight                               | 73.0g              | 200                    | 0.028X                      | 267.7                                 | 201.7  |       |
| 滤镜尺寸 Filter Thread                      | M43xP0.75          | 150                    | 0.037X                      | 203.6                                 | 153.6  |       |
| 工作温度 Working Temperature                | -20°C ~ +60°C      | 100                    | 0.054X                      | 140.5                                 | 105.8  |       |

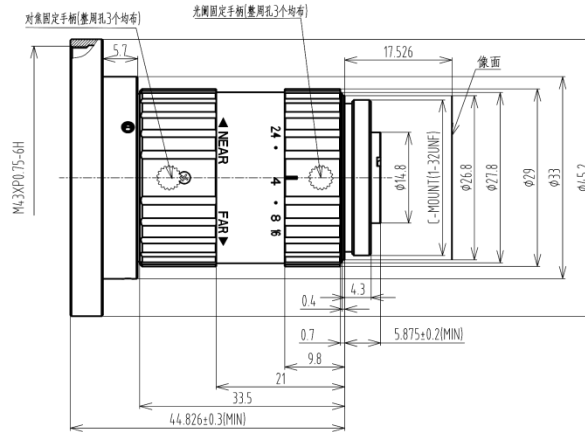