


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=25mm
- ◆ 1000 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 兼容可见光和红外波段适用



产品规格书：

1000 万像素 25mm 工业镜头 C Mount		物距 Working Distance	倍率 Magnifi- cation	视野 2/3"Field of View(mm)		
型号 Model	<b>VM2528MP10</b>	mm	X	横边 H	纵边 V	
像机尺寸 Image Size	2/3-inch	1000	0.025X	333.01	276.79	
焦距 Focal length	25mm	900	0.028X	299.19	248.67	
光圈范围 F No.	F2.8-16	850	0.029X	282.26	234.60	
最短物距 M.O.D(m)	0.15-Inf.	800	0.031X	265.35	220.55	
控制方式 Operation	Iris	Manual 手动调整	750	0.033X	248.42	206.48
	Focus	Manual 手动调整	700	0.036X	231.49	192.41
视场角 Angle of View (D×H×V)	2/3"	24.8°×19.9°×15.0°	650	0.038X	214.59	178.36
	1/2"	18.2°×14.6°×11.0°	600	0.042X	197.68	164.31
	1/3"	13.7°×10.9°×8.2°	550	0.045X	180.77	150.25
畸变 TV Distortion	-0.02%	500	0.050X	163.85	136.18	
光学后焦 BFL	10.31mm	450	0.056X	146.94	122.13	
法兰距 Flange FL	17.526mm	400	0.063X	130.01	108.06	
接口 Mount	C-Mount	350	0.071X	113.08	93.99	
近摄视野 2/3"FOV	45.3mm×37.7mm(WD=150mm)	300	0.083X	96.17	79.93	
外形尺寸 Dimension	Φ29×35.2mm	250	0.100X	79.25	65.87	
重量 Weight	54.8g	200	0.125X	62.31	51.79	
滤镜尺寸 Filter	M27 P=0.5mm	150	0.167X	45.38	37.72	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.250X	29.26	24.32	

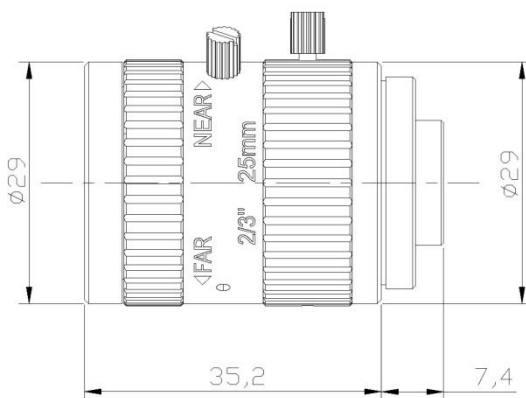