


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 40mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书：

1200 万像素 40mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View (7.6*5.7mm)		
型号 Model	LM4028MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch (Φ 9.5)	1000	0.0426X	178.44	133.86	
焦距 Focal length	40mm	900	0.0409X	161.91	121.45	
光圈范围 F No.	F2.8-16	800	0.0461X	145.27	108.96	
最短物距 M.O.D(m)	0.25-Inf.	700	0.0528x	128.49	96.37	
控制方式 Operation	Iris	Manual 手动调整	650	0.0569X	120.04	90.03
	Focus	Manual 手动调整	600	0.0618X	111.54	83.65
视场角 (D*H*V) Angle of View	1/1.7"	12.78°x10.53°x7.04°	550	0.0676X	102.99	77.23
畸变 Distortion	<0.02%	500	0.0806X	94.36	70.76	
光学后焦 BFL	12.1~24.5mm	450	0.0831X	85.66	64.23	
法兰后焦距 Flange BFL	17.526mm	400	0.0938X	76.86	57.63	
接口 Mount	C-Mount	350	0.1120X	67.94	50.94	
最大主光线夹角 CRA	5.1°	300	0.1266X	58.87	44.13	
外形尺寸 Dimension	Φ33x41.5mm	250	0.1535X	49.59	37.18	
重量 Weight	67.3g	200	/	/	/	
滤镜尺寸 Filter Thread	M27xP0.5	150	/	/	/	
工作温度 Working Temperature	-20°C ~ +60°C	100	/	/	/	

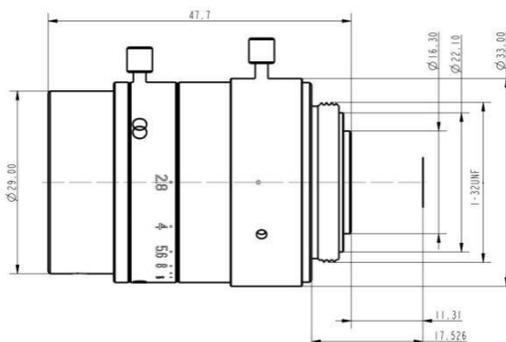