


- ◆ 品牌：中联科创 (ZLKC)
- ◆ 规格：1/1.7" C 型 f=4mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高分辨率影像
- ◆ 高精度, 低畸变, 微距效果好
- ◆ 抗震性能好, 高低温图像稳定
- ◆ 适用工业检测, 机器视觉等



产品规格书:

1200 万像素 4mm 工业镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 1/1.7" Field of View(7.4*5.6mm)		
型号 Model	VM0428MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch	5000	0.0008x	9420.9	7176.3	
焦距 Focal length	4mm	2000	0.0020X	3786.1	2883.8	
光圈范围 F No.	F2.8-16	1000	0.0039X	1908.1	1453.1	
最短物距 M.O.D(m)	0.1-Inf.	900	0.0044x	1720.3	1310.0	
控制方式 Operation	Iris	Manual 手动调整	800	0.0049X	1532.5	1166.9
	Focus	Manual 手动调整	700	0.0056X	1344.7	1023.8
视场角 Horizontal Angle of View (D×H×V)	1/1.7"	98.2°×86.1°×70.8°	600	0.0065X	1156.9	880.8
	1/2"	90.27°×78.11°×62.54°	550	0.0071X	1062.9	809.1
	1/3"	74.54°×62.54°×48.71°	500	0.0078X	967.0	737.6
畸变 Distortion	<0.8%	450	0.0086X	875.1	666.1	
光学后焦 BFL	9.916mm	400	0.0096X	781.2	594.6	
法兰后焦距 Flange BFL	17.526mm	350	0.011X	687.3	523.0	
接口 Mount	C-Mount	300	0.013X	593.4	451.5	
外形尺寸 Dimension	Φ48.6×56.49mm	250	0.015X	499.5	380.0	
重量 Weight	107.2g	200	0.019X	405.6	308.5	
滤镜尺寸 Filter Thread	-	150	0.024X	311.7	237.0	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.035X	217.9	165.5	

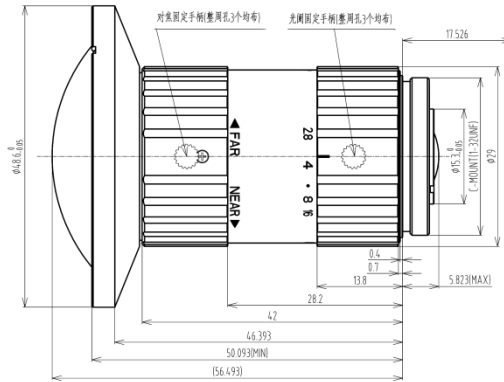