


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 f=6mm F2.4
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高分辨率影像
- ◆ 高精度, 低畸变, 微距效果好
- ◆ 抗震性能好, 高低温图像稳定
- ◆ 适用工业检测, 机器视觉等

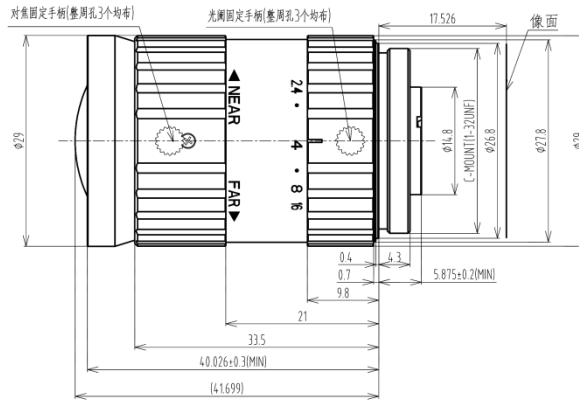

产品规格书：

1200 万像素 6mm 工业镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 1/1.7" Field of View(7.4*5.6mm)		
型号 Model	<b>VM0624MP12</b>	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch	5000	0.0012x	6366.1	4801.3	
焦距 Focal length	<b>6mm</b>	2000	0.003X	2556.9	1928.5	
光圈范围 F No.	<b>F2.4-16</b>	1000	0.006X	1284.0	968.3	
最短物距 M.O.D(m)	<b>0.1-Inf.</b>	900	0.0065x	1157.0	872.4	
控制方式 Operation	Iris	Manual 手动调整	800	0.007X	1029.9	776.6
	Focus	Manual 手动调整	700	0.008X	902.9	680.8
视场角 Horizontal Angle of View (D×H×V)	1/1.7"	76.01°×64.06°×50.54°	600	0.010X	775.8	585.0
	1/2"	66.01°×64.8°×42.53°	550	0.011X	712.3	537.1
	1/3"	53.56°×43.97°×33.71°	500	0.012X	649.1	489.4
畸变 Distortion	<0.1%	450	0.013X	585.3	441.2	
光学后焦 BFL	11.737mm	400	0.014X	521.8	393.3	
法兰后焦距 Flange BFL	17.526mm	350	0.016X	458.2	345.4	
接口 Mount	C-Mount	300	0.020X	394.7	297.5	
外形尺寸 Dimension	Φ29×41.70mm	250	0.023X	331.2	249.6	
重量 Weight	87.0g	200	0.028X	267.7	201.7	
滤镜尺寸 Filter Thread	-	150	0.037X	203.6	153.6	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.054X	140.5	105.8	