


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 f=75mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高分辨率影像
- ◆ 高精度, 低畸变, 微距效果好
- ◆ 抗震性能好, 高低温图像稳定
- ◆ 适用工业检测, 机器视觉等



产品规格书:

1200 万像素 75mm 工业镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 1/1.7"Field of View(7.4*5.6mm)		
型号 Model	VM7528MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch	5000	0.0154X	481.6	364.6	
焦距 Focal length	75mm	4000	0.0193X	383.9	290.6	
光圈范围 F No.	F2.4-16	3000	0.0259X	286.1	216.6	
最短物距 M.O.D(m)	0.5-Inf.	2500	0.0312X	237.2	179.6	
控制方式 Operation	Iris	Manual 手动调整	2000	0.0393X	188.3	142.6
	Focus	Manual 手动调整	1500	0.0531X	139.5	106.9
视场角 Horizontal Angle of View (D×H×V)	1/1.7"	6.45°×5.1°×3.9°	1000	0.0817X	91.9	69.9
	1/2"	5.5°×4.4°×3.3°	950	0.0864X	87.1	66.2
	1/3"	4.15°×3.3°×2.5°	900	0.0916X	82.2	62.5
畸变 Distortion	<0.046%	850	0.0975X	77.3	59.8	
光学后焦 BFL	13mm (min)	800	0.1042X	72.4	55.1	
法兰后焦距 Flange BFL	17.526mm	750	0.1119X	67.5	51.4	
接口 Mount	C-Mount	700	0.1209X	62.6	47.6	
外形尺寸 Dimension	Φ36.8×69.2mm	650	0.1291X	58.5	43.9	
重量 Weight	164.0g	600	0.1398X	54.0	40.5	
滤镜尺寸 Filter Thread	M34xP0.5	550	0.1525X	49.5	37.13	
工作温度 Working Temperature	-20°C ~ +60°C	500	0.1678X	45.0	33.75	

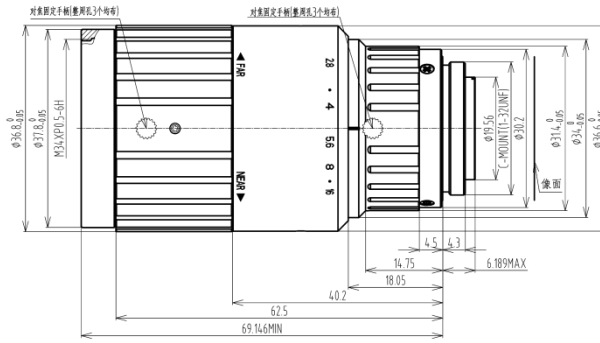